



DIP Stick Level Probe

PT/EL DS Series



- $\pm 0.25\%$ Accuracy
- Ranges 5"WC-300 psig, Vacuum & Absolute
- 4-20 mA, 2 wire output
- Custom lengths available
- HART® Protocol

The Dip Stick Level Probe transmitter (PT/EL DS series) is designed for top mount locations in tanks. This unit is ideal for installation in mixing, blending, white water tanks and wastewater treatment locations. Supplied with either a 1" (Miniature) or 1 1/2" ceramic diaphragm sensor, the Dip Stick Level Probe transmitter provides a stable measuring environment for many difficult applications. Standard lengths are 18", 2', 4', 6', and 8'. Non-standard lengths can be ordered to individual specifications. Flexible configurations to suit your specific application are available including Smart technology using Hart® protocol, Aluminum or Stainless Steel terminal heads, LCD displays, remote electronics, and chemical resistant cable.

Pneumatically Operated Transmitters Also Available

STANDARD SPECIFICATIONS

■ Sensing Area

1½" or 1"

■ Full Scale Ranges

0 - 5"WC to 0 - 300 psi gauge
 ± 5"WC to ± 400"WC Compound
 0 - 3"Hg to 0 - 30"Hg Vacuum
 0 - 15 psi to 0 - 150 psi absolute

■ Static Accuracy

± 0.25% of Full Scale
 Combined non-linearity, hysteresis, and repeatability

■ Compensated Temperature Range

-4°F to 175°F (-20°C to 80°C)

■ Operating Temperature Range

Ambient: -4°F to 175°F (-20°C to 80°C)
 Process: -4°F to 250°F (-20°C to 125°C)

■ Temperature Effects

1½" Diameter:

Thermal Zero Shift: ±0.0075%/°C

Thermal Span Shift:

± 0.005%/°C for ranges < 6 psi
 ± 0.003%/°C for ranges 6 psi and above

1" Diameter:

Thermal Zero Shift: ±0.010%/°C

Thermal Span Shift: ± 0.004%/°C

■ Overpressure

10X for Full Scale Ranges up to 15 psi
 4X for Full Scale Ranges from 15 to 150 psi
 2X for Full Scale Ranges over 150 psi

■ Electrical

Output: 2-wire, 4-20 mA
 Supply Voltage: 24 VDC nominal supply

■ Cable

CV/P - 10' Polyurethane
 CV/T - 10' Teflon FEP

PMC adopts a continuous development program which sometimes necessitates specification changes without notice.

ORDERING INFORMATION

PT/EL DS Series DIP Stick Level Probe

When ordering please specify the following:

MODEL PMC	
PT/EL DS	1 1/2" Diameter
MIN PT/EL DS	1" Diameter
Range	Specify psi, " WC, bar, absolute, gauge, etc.
Diaphragm	
Cer	Ceramic
Termination	
CV/P	Polyurethane Cable
CV/T	Teflon FEP Cable
TH	Aluminum Terminal Head
TH/D	adds LCD Display
TH/SS	SS Terminal Head
TH/SS/D	adds LCD Display

(1) Select
 (2) Specify
 (3) Select
 (4) Select

Order Code Example: PMC-MIN PT/EL DS-72"WC-Cer-TH/SS

- (1) Model: PMC-MIN PT/EL DS
- (2) Range: 72" WC
- (3) Diaphragm Material: Ceramic
- (4) Electrical Termination: Terminal Head Stainless Steel


Dip Stick Assembly:

Specify length of SS tube required. Standard lengths include 18", 2', 4', 6', and 8'. For combination lengths such as 12' (4' + 8') a joint kit is required for each connection point. Tubing is 1 1/32" O.D. with .150" Wall Thickness.

OPTIONS

- Remote Electronics
- LCD Display
- Terminal Junction
- Cabled Versions
- HART® Smart Electronics

Contact PMC for other options and accessories

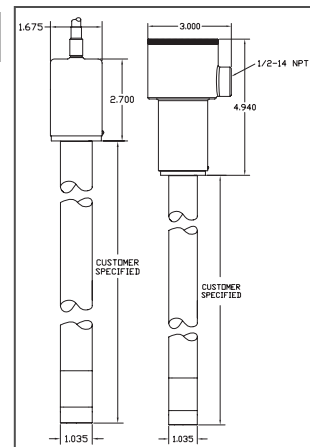

All measurements shown in inches

HEAD OFFICE



Process Measurement & Controls, Inc.

11 Old Sugar Hollow Road
 Danbury, CT 06810 U.S.A.
 Tel: 203-792-8686
 Fax: 203-743-2051
 Email: sales@pmc1.com
 www.pmc1.com

Represented By: