



## Smart Electronic Pressure, Level, and Vacuum Transmitters

### *SMT PT/EL TH/SS Series*



- Remote Configuration using HART® Protocol
- Nema 4X Stainless Steel Terminal Junction Head
- $\pm 0.25\%$  FS Accuracy
- Ranges 5"WC-300 psig, Vacuum & Absolute
- 3A Sanitary available



**PMC Smart Electronic Pressure Transmitters (SMT PT/EL)** combine state-of-the-art temperature compensated capacitive sensor technology with microprocessor-based electronics to provide remote digital communications using a HART® protocol communicator. Using the HART communicator, the transmitter can easily and remotely be configured for specific ranges, calibrated, and tested. The transmitter provides a 2-wire 4-20mA output.

The **SMT PT/EL** transmitters accurately measure pressure, level, and vacuum in processes where clogging of the diaphragm face is a particular concern. The small, 1½" diameter of the transmitter allows installation flush with the inside wall of pipes 3" in diameter and larger. This feature eliminates the usual pocketing problems encountered with conventional flange-mounted and recessed-diaphragm transmitters. The high precision capacitive ceramic sensor is ideally suited for high-wear applications. The SMT PT/EL Series of transmitters offers overpressure protection of up to 10 times the full scale range. The Nema 4X rated, Stainless Steel Terminal Junction Head provides a corrosion resistant and flexible solution for connection to the transmitter and can be configured with a Local LCD Display. Access to the terminal strip is provided through the threaded and O-ring sealed cover. Cables enter the Terminal Junction Head via a ½" NPT threaded port. The optional ½" Nylon Gland Nut provides a liquid-tight cord connection.

**3A Sanitary version (SAN)** provides your choice of certified sanitary process connections including weld-on nipple, NPT threaded nipple, or Tri-Clamp. Double Ring version (DR) provides your choice of process connections including weld-on nipple, or NPT threaded nipple. See the Process Connections Datasheet for a detailed list and description of options.

***Pneumatically Operated Transmitters Also Available***

## STANDARD SPECIFICATIONS

### ■ HART® Communications

Configuration, Calibration, and Test using HART compatible communicator

### ■ Full Scale Ranges

0 - 5"WC to 0 - 300 psi gauge  
 ± 5"WC to ± 400"WC Compound  
 0 - 3"Hg to 0 - 30"Hg Vacuum  
 0 - 15 psi to 0 - 150 psi absolute

Ranges below 40"WC, absolute ranges, and/or compound ranges available with ceramic diaphragm only

### ■ Static Accuracy

± 0.25% of Full Scale  
 Combined non-linearity, hysteresis, and repeatability

### ■ Overpressure

10X for Full Scale Ranges up to 100 psi  
 4X for Full Scale Ranges over 100 psi

### ■ Compensated Temperature Range

-4°F to 175°F (-20°C to 80°C)

### ■ Operating Temperature Range

Ambient: -40°F to 175°F (-40°C to 80°C)  
 Process: -40°F to 250°F (-40°C to 125°C)

### ■ Temperature Effects

*Thermal Zero Shift:* ±0.0075%/°C

*Thermal Span Shift:*

± 0.005%/°C for ranges < 6 psi  
 ± 0.003%/°C for ranges 6 psi and above

### ■ Electrical

Output: 2-wire, 4-20 mA  
 Supply Voltage: 24 VDC nominal supply

### ■ Zero Setting

± 5% FS, potentiometer adjustment

### ■ Span Setting

± 15% FS, potentiometer adjustment

### ■ Housing

Nema 4X, EMI / RFI protected, 316L Stainless Steel Construction

PMC adopts a continuous development program which sometimes necessitates specification changes without notice.

## ORDERING INFORMATION

# SMT PT/EL TH/SS Series

## Smart Electronic Pressure, Level, and Vacuum Transmitters

When ordering please specify the following:

MODEL PMC - SMT PT/EL	
SAN	Sanitary version
DR	Double Ring version
Range	Specify psi, " WC, bar, absolute, gauge, etc.
Diaphragm	
Ha	Havar
Hc	Hastelloy C
Ta	Tantalum
Cer	Ceramic
Termination	
TH-SS	SS Terminal Head
TH-SS/D	adds LCD Display

(1) Select (2) Specify (3) Select (4) Select


### Order Code Example: PMC-SMT-PT/EL-SAN-30"WC-Cer-TH-SS/D

- (1) Model: PMC-SMT-PT/EL-SAN
- (2) Range: 30"WC
- (3) Diaphragm Material: Ceramic
- (4) Electrical Termination: 316L Stainless Steel Terminal Head

## OPTIONS

- Remote Electronics
- Gland Nut Cable Connection
- LCD Display
- Submersible Versions
- Process Connections  
Sanitary, Flush-Mount, Tri-Clamp, Flange and Threaded Process Connections available

Contact PMC for other options and accessories

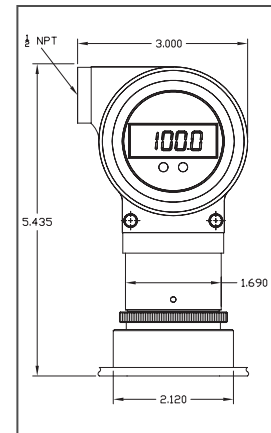

All measurements shown in inches

HEAD OFFICE



### Process Measurement & Controls, Inc.

11 Old Sugar Hollow Road  
 Danbury, CT 06810 U.S.A.  
 Tel: 203-792-8686  
 Fax: 203-743-2051  
 Email: sales@pmc1.com  
[www.pmc1.com](http://www.pmc1.com)

Represented By: