

### *Pressure Transducer Series ASM*



- **Miniature size: 0.59" A/F**
- **Ranges from 200 to 3000psi**
- **High accuracy:  $\pm 0.2\%$**
- **0.5 to 4.5V output**
- **5V or 8-16Vdc supply**
- **High temperature: -5 to 300°F**
- **Rugged construction**

KA Sensors is a dynamic and flexible company offering over 30 years of sensor design and instrumentation experience to the demanding motor sports industry. Our founding principles are to provide a complete solution to our customers, with service and confidentiality being paramount. Our understanding of the complex requirements of racing make us the ideal Company to assist in your testing and gain those valuable thousandths of a second each lap.

The ASM series is a high performance rugged and very small pressure transducer designed specifically for use in harsh motor sport environments. The design is calibrated and features the ability to operate to a very high performance at temperatures up to 300°F. The modular construction and associated components have been designed to provide quick deliveries over a wide range of configurations.

We offer flexibility to customize the ASM series to meet the requirements of specific applications.

Typical applications include: **Fuel - Oil - Air - Coolant - Brakes - Water - more.....**

**Please contact our expert technical staff to discuss your application**

(See back page for specifications)

## Specifications

### ■ Range

Standard Ranges are 0-200, 500, 1500 and 3000psi sealed gauge or absolute.

*Other ranges and units can be specified*

### ■ Accuracy

±0.2% FS

*Combined linearity, hysteresis and repeatability*

### ■ Pressure Rating

Over-range (proof pressure): 1.5X FS for all ranges

Burst pressure: >3X FS for all ranges

### ■ Temperature Rating

Operating: -5 to 300°F (-20 to 150°C)

Compensated: 30 to 300°F (0 to 150°C)

### ■ Temperature Effects

TC Zero: ±0.006% FS /°F

TC Span: ±0.006% Reading /°F

### ■ Electrical

Supply voltage: 5V ratiometric or 8-16Vdc

Output: 0.5 to 4.5V

*Others possible, please consult the factory*

EMC protection: EN 50082-1

### ■ Construction

Stainless Steel, electron beam welded

*Contact the factory for other materials*

### ■ Mechanical

Vibration: Mil-Std-810C, Curve L, 20g.

### ■ Mounting Connection

M5, M8, or M10.

*Others available, please contact the factory*

### ■ Electrical Connection Options

20" standard length, 4 conductor 26AWG 55spec

Raychem cable with DR25 Sleeving.

*Longer length cable available. Also please contact the factory for integral connector.*

KA/PMC adopts a continuous development program which sometimes necessitates specification changes without notice

## Other Products

### ■ KA/PMC offers a wide range of products for the Motor Sport Industry

### ■ Pressure

AS and ASL for different configurations and features.  
ASMT for combination pressure and temperature.

### ■ Other Sensors

Comprehensive range of sensors are offered for the following measurements:

Load – Force – Torque – Temperature – Acceleration  
Displacement - Speed

### ■ Other capabilities

The following support capabilities are available:  
Signal Conditioning – Controls – Logging – more....

*Please contact the factory for additional information*


## How to Order

### ■ Please provide the following:

Model No:	ASM
Pressure Range:	Must specify
Mounting connection:	M5, M8 or M10
Cable Length:	20" is standard
Special Requirements:	Refer to factory

## Standard Configuration

All dimensions nominal in inches

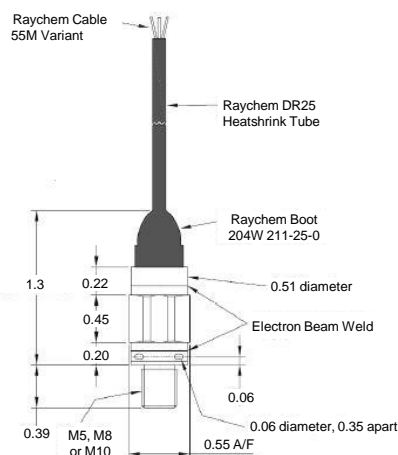

HEAD OFFICE



Process Measurement & Controls, Inc.

11 Old Sugar Hollow Road

Danbury, CT 06810 U.S.A.

Tel: 203-792-8686

Fax: 203-743-2051

Email: sales@pmc1.com

www.pmc1.com

Represented By: